


ZX10-EX FULLY RUGGED TABLET



- Certification ATEX et CEIEx Zone 2/22 pour un usage en zones explosives
- Processeur 8 cœurs Qualcomm® Snapdragon™ 660
- Écran tactile capacitif LumiBond de 10.1" compatible avec le port de gants et avec la technologie de lecture en plein soleil Getac
- Certification MIL-STD-810H et IP66, avec résistance aux chutes de 1,8 m (6 pi)
- Lecteur de code-barres et RFID (en option)
- Vérifié comme Android enterprise recommended ^{viii}

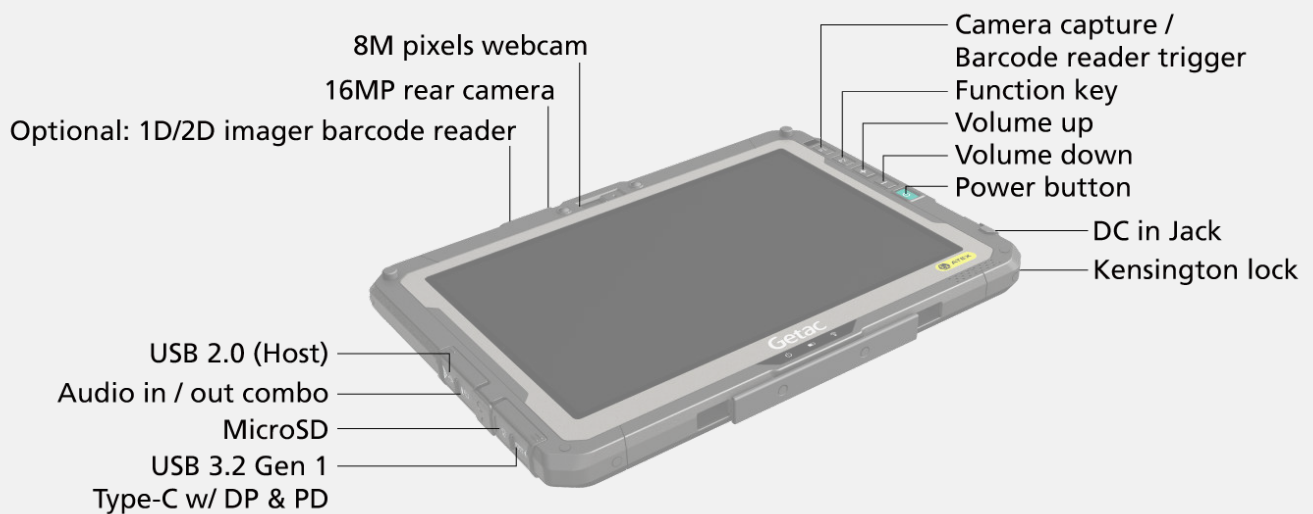

SPECIFICATIONS

Operating System

Android™ 12.0

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)
800 nits LumiBond display with Getac sunlight readable technology

Storage & Memory

4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo reader †

I/O Interface

8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1

Communication Interface

Wi-Fi 802.11 a/b/g/n/ac
Bluetooth (v5.0) †
Dual Micro SIM
Dedicated GPS
Optional: 4G LTE mobile broadband

Security Feature

Kensington lock
Optional: Smart card reader
Optional: HF RFID/NFC combo reader †

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery(3.84V, typical 4990mAh;
min. 4870mAh)x 2
Optional: High capacity Li-ion battery (3.84V,
typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weigh

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")
1.04kg (2.40lbs) ††

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
ATEX & IECEx certified

Environmental Specification

Temperature ††:
- Operating: -21°C to 55°C / -5.8°F to 131°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search, Chrome,
Gmail, Maps, YouTube, Play, Drive, YouTube music,
Google TV, Duo and photos)
Getac enrollXpress

Optional software

Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh;
min. 4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Digitizer pen

Optional:

Carry bag
Battery (3.84V, typical 4990mAh;
min. 4870mAh)
High capacity Li-ion battery (3.84V,
typical 9980mAh; min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Digitizer pen with tether
Anti-static protection film
Hard handle †
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Rotating hand strap with kickstand
100W Type-C AC adapter

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Factory option. Not user-swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.